


TYPE
WP/ST
ALT 1

S
Thickness mm.
40-50
60-80-100




OPTION
PIR B-s2,d0

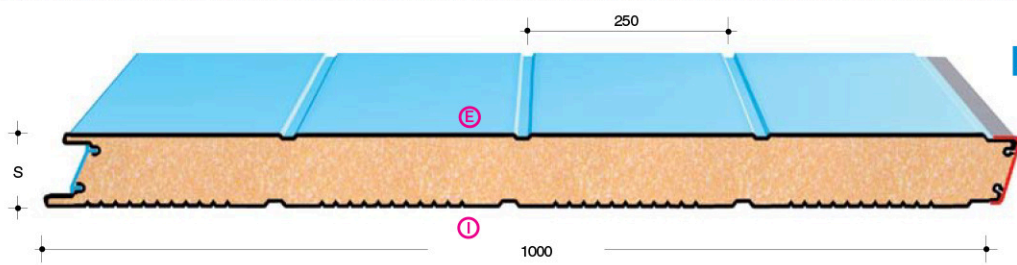

Technical characteristics and performances:

- Supports:** **STEEL** - S 250 GD according UNI EN 10346 norm, mechanical characteristics as D.M. of 14/01/2008 and tolerances according UNI EN 10143 norm
- ALUMINIUM** - UNI EN 1396 with minimum yielding limit 150 Mpa
- COPPER** - UNI EN 1172
- COR-TEN**
- STAINLESS STEEL** - According UNI EN 10088-1 norm
- Insulation:** PUR Density ~ 40 Kg/m3 UNI EN 13165 - PIR UNI EN 13501-1
- Standard panel:** Width mm. 1000

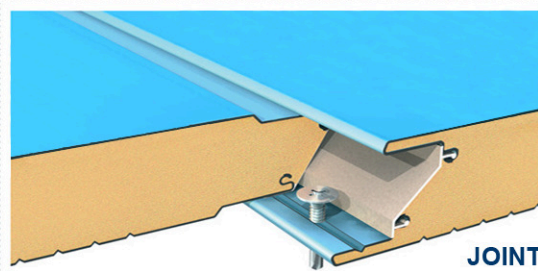

JOINT

THERMIC INSULATION				U.M.	Useful loads uniformly distributed in KG/m ² – KN/m ²									
S thickness mm	Kcal m ² ·h·°C	U W m ² ·°C	weight Kg/m ²		SPAN IN m ℓ									
40	0,461	0,536	10,15	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	1,63	1,22	0,88	0,68	0,54	1,74	1,37	1,05	0,83
50	0,372	0,433	10,53	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	2,21	1,57	1,18	0,88	0,68	2,41	1,78	1,37	1,13
60	0,313	0,364	10,91	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	2,89	2,16	1,42	1,15	0,85	3,21	2,37	1,81	1,41
80	0,237	0,276	11,67	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	4,46	3,09	2,22	1,57	1,18	4,91	3,58	2,74	2,11
100	0,191	0,222	12,63	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	4,70	3,45	2,60	2,00	1,60	5,10	3,90	2,85	2,25

LOAD CONDITIONS WITH STEEL SUPPORTS:
The values shown in the tables are indicative and referred to a deflection $f \leq 1/200$ of the span ℓ (m) for panels with thickness of STEEL supports 0,5+0,5 mm. For sizing and checking refer to the enclosed E of the UNI EN 14509 Norm and to the values shown in the CE certification. The letter **I** **E** shows the required painted side.

THERMIC INSULATION				U.M.	Useful loads uniformly distributed in KG/m ² – KN/m ²									
S thickness mm	Kcal m ² ·h·°C	U W m ² ·°C	weight Kg/m ²		SPAN IN m ℓ									
40	0,461	0,536	5,16	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	1,06	0,62	0,40	0,26	0,18	1,46	0,93	0,63	0,43
50	0,372	0,433	5,56	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	1,47	0,90	0,58	0,40	0,28	1,90	1,26	0,87	0,61
60	0,313	0,364	5,96	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	1,87	1,18	0,79	0,55	0,39	2,32	1,59	1,11	0,81
80	0,237	0,276	6,76	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	2,67	1,76	1,22	0,87	0,63	3,11	2,20	1,62	1,21
100	0,191	0,222	7,56	Kg/m ²	2,00	2,50	3,00	3,50	4,00	2,00	2,50	3,00	3,50	4,00
					KN/m ²	2,90	2,35	1,80	1,10	0,90	3,10	2,55	1,90	1,35

LOAD CONDITIONS WITH ALUMINIUM SUPPORTS:
The values shown in the tables are indicative and referred to a deflection $f \leq 1/200$ of the span ℓ (m) for panels with thickness of ALUMINIUM supports 0,6+0,6 mm. For sizing and checking refer to the enclosed E of the UNI EN 14509 Norm and to the values shown in the CE certification. The letter **I** **E** shows the required painted side.